KING DESIGN®
Reliability & Communication Testing Instruments
KING DESIGN INDUSTRIAL CO., LTD.
5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,
Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094
VIBRATION LABORATORY
http://www.kdi.tw
http://www.vibration.com.tw
E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

REPORT NO：VT-191211-1

COMPANY ：Tibbo Technology Inc.
ADDRESS ：9F-3, No.31, Lane 169, Kang-Ning St., Hsi-Chih, New Taipei City, Taiwan 22180
TEL ：886-2-26925443
FAX ：886-2-26923139
SPECIMEN ：Tibbo Project System(G2)

DATE OF RECEIVED ：2019/11/29
DATE OF TESTED ：2019/12/04

TEST / INSPECTION ITEMS：Vibration Test

REMARKS：

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 7 pages, and no part of it may be abstracted or reproduced.

Test Engineer：Hsin Tai Chang	
Approval Signatory：2019.12.16 David Lee	Laboratory Head：Hsin Tai Chang

KING DESIGN INDUSTRIAL CO., LTD.
5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,
Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094
VIBRATION LABORATORY
http://www.kdi.tw
http://www.vibration.com.tw
E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

TESTING EQUIPMENT：

1.Vibration Tester ：KING DESIGN KD-9363EM-600F2K-50N120, S/N：KDS11054783
2.Controller ：VCS-913+, S/N：1312416
3.Control Accelerometer ：Wilcoxon Research WR-777, S/N：4207

TEST ENVIRONMENT：

Temperature ：24.5℃ (25±10℃)
Relative Humidity ：55%RH (50±25% RH)

SPECIMEN：

Model ：Tibbo Project System(G2)
Quantity ：2 units

KING DESIGN®
Reliability & Communication Testing Instruments
KING DESIGN INDUSTRIAL CO., LTD.
VIBRATION LABORATORY
5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,
Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094
http://www.kdi.tw
http://www.vibration.com.tw
E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

Reference to IEC-60068-2-64

1.Test1

Random vibration test

Frequency : 5 Hz to 500 Hz
Acceleration : 22 $(m/s^2)_{RMS}$
Test Axis : Z axis
Test Time : 30 mins (Each Axis)

2.Test2

Random vibration test

Frequency : 5 Hz to 500 Hz
Acceleration : 33 $(m/s^2)_{RMS}$
Test Axis : Z axis
Test Time : 30 mins (Each Axis)

3.Test3

Random vibration test

Frequency : 5 Hz to 500 Hz
Acceleration : 45 $(m/s^2)_{RMS}$
Test Axis : Z axis
Test Time : 60 mins (Each Axis)

TEST RESULT：

Describe	PASS	FAIL	Non-Judgment
Function judgment(1)	√	——	——
Appearance check	√	——	——
(1)LED display pattern, If after the test this play pattern of LEDs are unchanged then the test can be consider as “PASS”, LED display pattern of LED are different or some of the LEDs are not working, then the test might be consider as “FAIL”			

KING DESIGN®
KING DESIGN INDUSTRIAL CO., LTD.
5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,
Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

http://www.kdi.tw
http://www.vibration.com.tw
E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

vibration test photos

Z-1

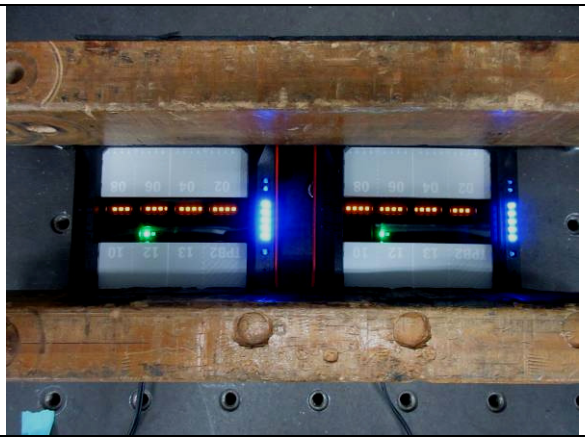

Z-2

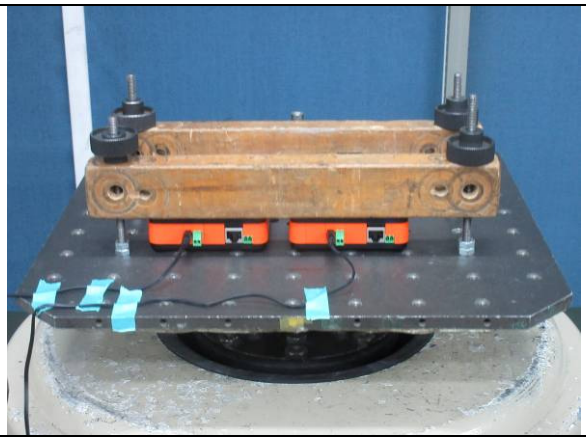

Z-3

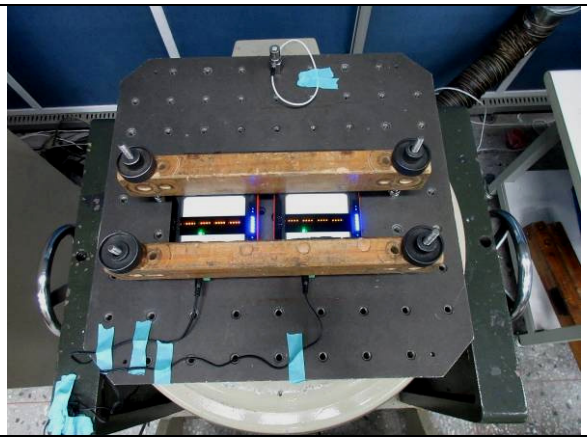

Z-4

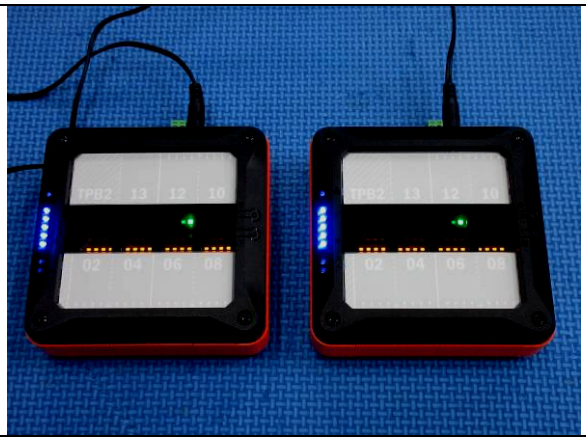

Z-5

Test1-----

Test Name: 5-500Hz 22 (m/s^2)rms-[VCS (Random)] **Test saved at:** Dec-04-2019, 10:39:57

Control Composite

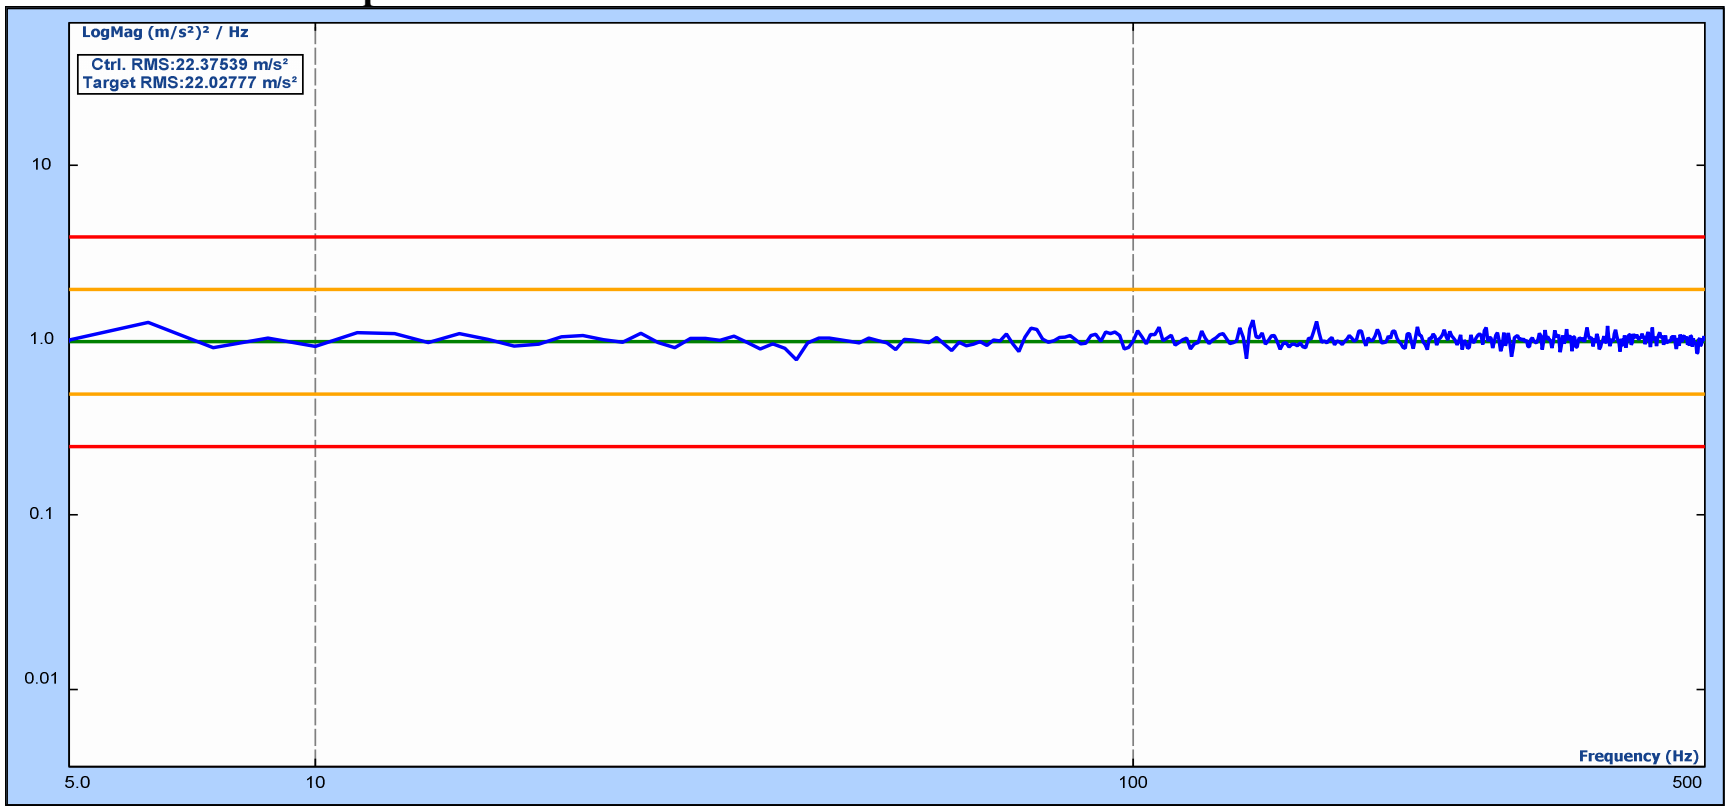

Level: 100.00 %
Velocity Pk: 231.4 mm/s
Remaining: 00:00:00
Block Size/Lines: 1024/400
Delta Frequency: 1.250000

Drive Pk: 1.031V
Control RMS: 22.38 m/s²
Total Elapsed: 00:31:19
Frame Time: 0.8 Seconds

Est. Disp. : 9.706 mm Pk-Pk
Target RMS: 22.00 m/s²
Full Level Elapsed: 00:30:00
DOF: 64

Test2-----

Test Name: 5-500Hz 33 (m/s^2)rms-[VCS (Random)] **Test saved at:** Dec-04-2019, 11:27:32

Control Composite

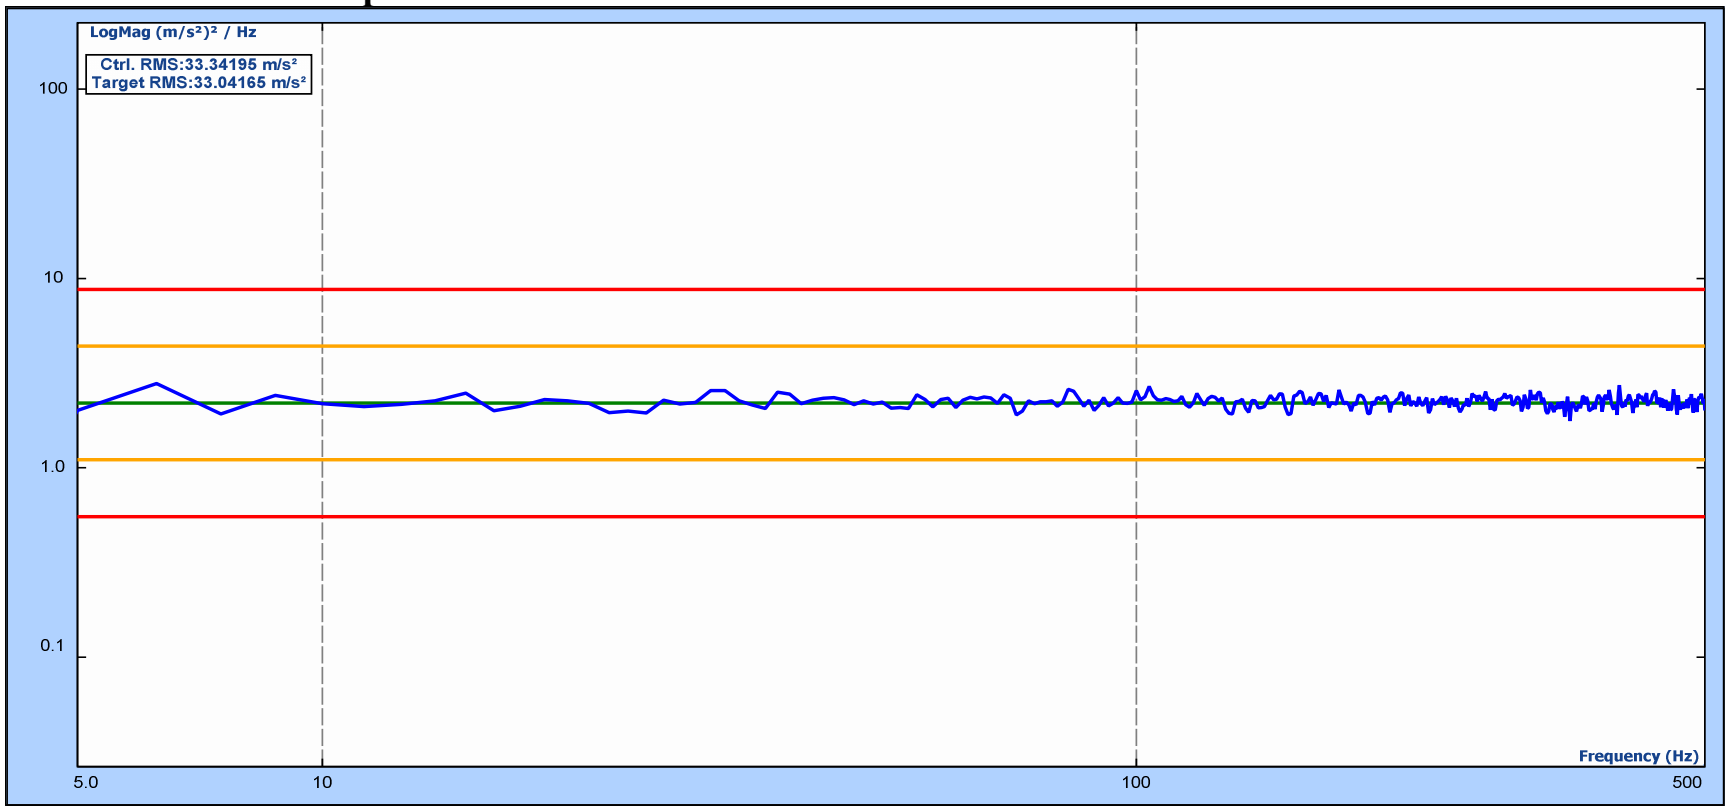

Level: 100.00 %
Velocity Pk: 340.3 mm/s
Remaining: 00:00:00
Block Size/Lines: 1024/400
Delta Frequency: 1.250000

Drive Pk: 2.088V
Control RMS: 33.34 m/s²
Total Elapsed: 00:31:18
Frame Time: 0.8 Seconds

Est. Disp. : 14.08 mm Pk-Pk
Target RMS: 33.00 m/s²
Full Level Elapsed: 00:30:00
DOF: 64

Test3-----

Test Name: 5-500Hz 45/ (m/s^2)rms-[VCS (Random)] **Test saved at:** Dec-04-2019, 13:12:15

Control Composite

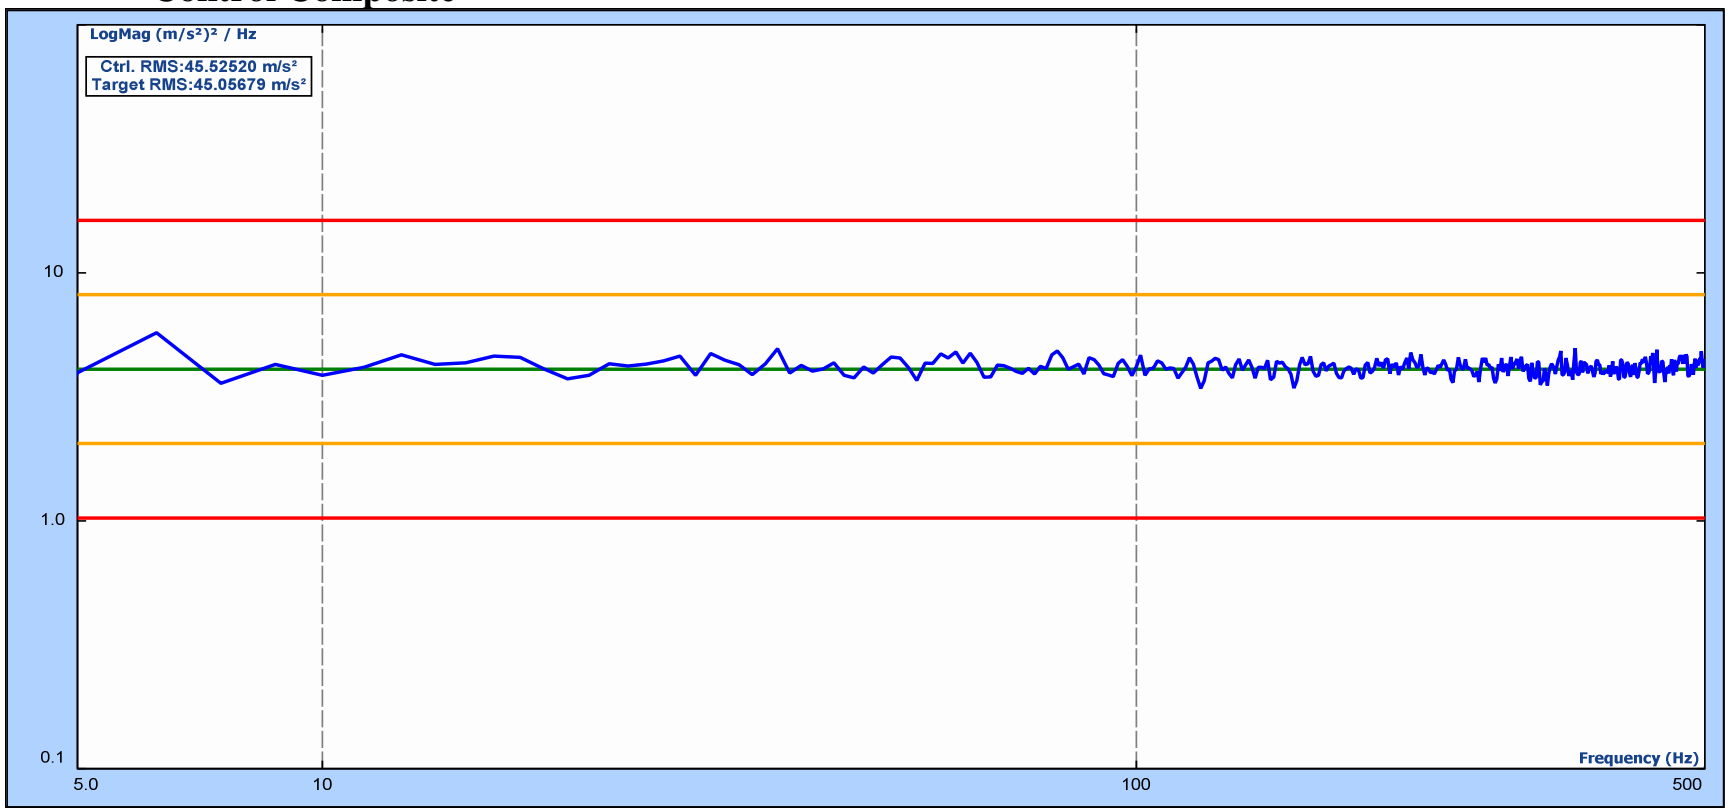

Level: 100.00 %
Velocity Pk: 473.6 mm/s
Remaining: 00:00:00
Block Size/Lines: 1024/400
Delta Frequency: 1.250000

Drive Pk: 2.203V
Control RMS: 45.53 m/s²
Total Elapsed: 01:01:21
Frame Time: 0.8 Seconds

Est. Disp. : 19.73 mm Pk-Pk
Target RMS: 45.00 m/s²
Full Level Elapsed: 01:00:00
DOF: 64

-END-